


Access map



OKK Inagawa factory
8-10 Kitaitami, Itami, Hyogo Prefecture
664-0831, Japan

From Kansai International Airport :
Please take a airport bus bound for
Osaka (Itami) International Airport
and take a taxi to OKK.

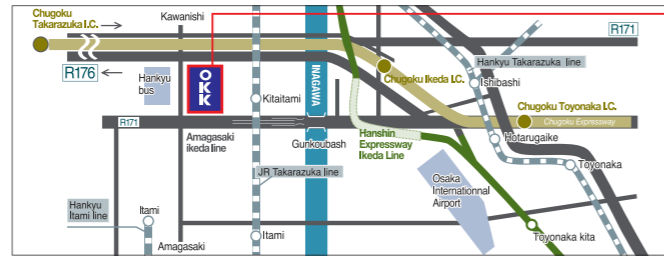

M-Plant



S-Plant



W-Plant

Technical center is for test cutting, demonstration and training.
S-plant is for machining and assembly of spindles and tables.
W-plant is for final assembly of large sized machining centers.
All are located at Inagawa, Itami city, Hyogo, Japan

INAGAWA PLANT:
8-10, KITA-ITAMI, ITAMI, HYOGO 664-0831 JAPAN
TEL:(81)72-782-5121
FAX:(81)72-772-5156
E-mail:eigibu@okk.co.jp

**OKK A DIVERSIFIED MANUFACTURER OF
MACHINE TOOLS**

Specializes In:

Machining centers
Graphite cutting machining centers
Grinding centers
CNC Milling machines
Conventional milling machines
Total die and mold making systems
Flexible manufacturing cells and systems

Other Products Include:

Textile Machinery
Water Maters

NOTE :

OKK reserves the right to change the information contained in
this brochure without notice.
OKK is not responsible to make changes to previously sold
machines or accessories.
The machines in the photographs of this brochure may include
optional accessories.

The export of this product is subject to an authorization from
the government of the exporting country.
Check with the government agency for authorization.

OKK USA CORPORATION
100 REGENCY DRIVE, GLENDALE HEIGHTS, IL 60139 USA
TEL:(1)630-924-9000
FAX:(1)630-924-9010
http://www.okkcorp.com
E-mail:okkusa@okkcorp.com

OKK USA WESTERN REGIONAL OFFICE(LA)
17971 SKY PARK CIRCLE, SUITE D, IRVINE CA 92614 USA
TEL:(1)949-851-6800
FAX:(1)949-851-6888

OKK CANADA OFFICE(CANADA)
79 REGAL ROAD, UNITS 17 & 18, GUELPH, ONTARIO N1K 1B6 CANADA
TEL:(1)630-924-9000
FAX:(1)630-924-9010

OKK EUROPE GmbH
HANSEMANNSTR. 33 41468 NEUSS GERMANY
TEL:(49)2131-29868-0
FAX:(49)2131-29868-41
http://www.okkeurope.com
E-mail:info@okkeurope.com

THAI OKK MACHINERY CO., LTD.
KUMTHORN HOLDING BUILDING 2ND FLOOR 897-897/1 RAMA III
ROAD BANGPONGPANG, YANNAWA, BANGKOK 10120 THAILAND
TEL:(66)2-683-2160-2
FAX:(66)2-683-2163

PT. OKK INDONESIA
WISMA NUSANTARA BUILDING 12 FLOOR,
JL.M.H.THAMRIN No.59, JAKARTA. 10350 INDONESIA
TEL:(62)21-390-2563
FAX:(62)21-390-2565

OKK(SHANGHAI) CO., LTD.
ROOM 2506, 2201 YAN AN ROAD(W.) CHANGNING DISTRICT
SHANGHAI. 200336 CHINA
TEL:(86)21-62700930
FAX:(86)21-62700931
http://www.okk.com.cn
E-mail:shanghai@okk.com.cn

OKK CORPORATION SEOUL BRANCH
1203, E & C DREAM TOWER 8, 327-27, GASAN-DONG,
GEUMCHEON-GU, SEOUL, 153-023 KOREA
TEL:(82)2-855-0416
FAX:(82)2-855-0426

Horizontal Machining Center

HMC SERIES

HMC 400
HMC 500



This high-speed machine features the strongest structural rigidity in its class and attains a rapid feed rate of 63m/min(2480ipm) with 1G acceleration.



HMC SERIES

CONTENTS

- 03 Mechanical layout
- 05 Spindle / Machining capabilities
- 06 High-precision Machining in a Shorter Cutting Time / Chip disposal measures
- 07 ATC / APC
- 08 Maximum workpiece size / Maintenance
- 09 Environmental measures
- 10 Optional accessories / Lift-up chip conveyor
- 11 Optional accessories / Option check sheet
- 12 OKK's dedicated control functions
- 13 Specifications HMC400
- 14 Dimensions HMC400
- 15 Specifications HMC500
- 16 Dimensions HMC500
- 17 Controller

Horizontal Machining Center

HMC 500

SPECIFICATIONS

Travel distance: **760x760x800mm** (29.92" (29.92") (31.50")
 Pallet size: **500x500mm** (19.69" (19.69")
 Maximum workpiece size: **ø800x1150mm** (31.50" (45.28")
 Rapid traverse rate: **63000mm/min** (2480ipm)
 Maximum acceleration: **1G**
 Number of stored tools: **60tools**
 Maximum tool diameter: **ø170mm** (6.69")

Horizontal Machining Center

HMC 400

SPECIFICATIONS

Travel distance: **560x560x690mm** (22.05" (22.05") (27.17")
 Pallet size: **400x400mm** (15.75" (15.75")
 Maximum workpiece size: **ø630x920mm** (24.80" (36.22")
 Rapid traverse rate: **63000mm/min** (2480ipm)
 Maximum acceleration: **1G**
 Number of stored tools: **40tools**
 Maximum tool diameter: **ø170mm** (6.69")

Mechanical layout

Machine design enables high-speed Production

The column mass is optimized to allow movement of 63m/min (2480ipm) rapid feed rate with acceleration of 1G. This combined with a servo driven ATC enables a C-to-C time of 2.8 seconds (HMC400) / 2.9 seconds (HMC500) and large reduction of non-cutting time.





Core cooling ball screws and Double-anchor pre-tension system




Lubrication oil cooler unit

HMC Series uses core cooling ball screws on the X, Y and Z axes. Circulation of cooling oil through the ball screws, around ball screw support housings and motor mounting surfaces reduces the thermal displacement and maintains accuracy during long machining time.

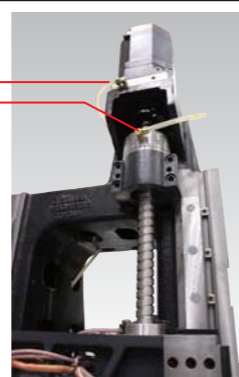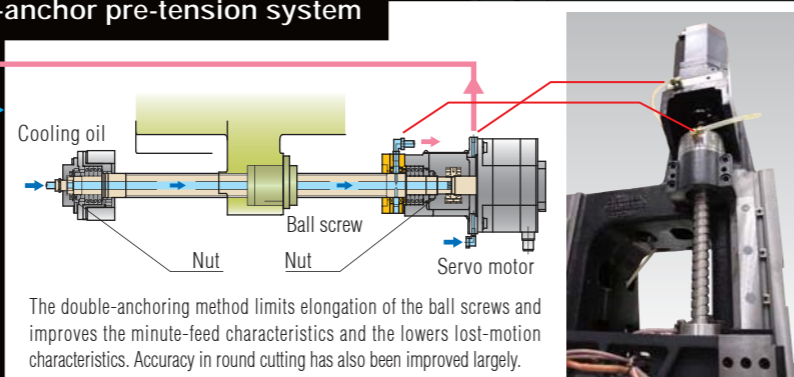


The spindle nose reaches close to the pallet center

Reducing the minimum distance from the spindle nose to the pallet center makes it with shorter tools producing highly-rigid machining.

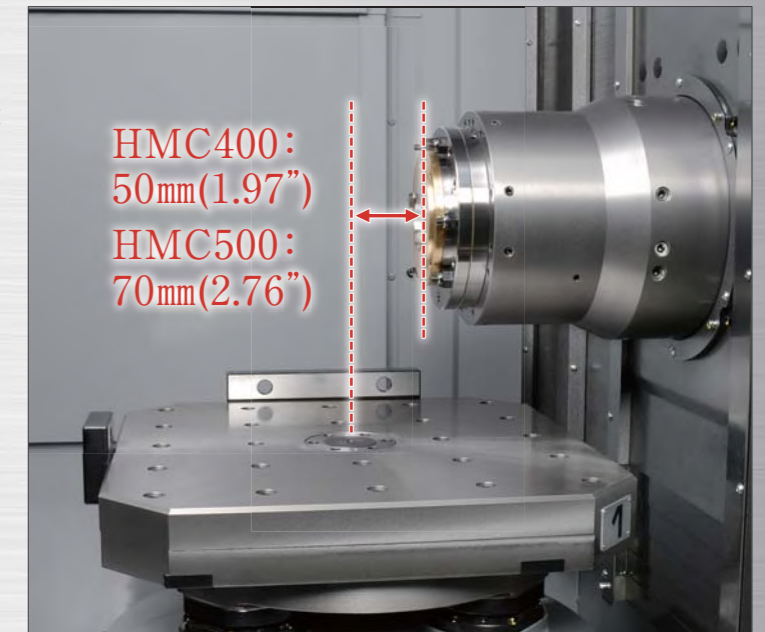

Highly rigid structure

The HMC Series utilizes a wide column and highly rigid roller guides. This produces great aluminum machining performance and also the machining of a wider range of workpieces, including cast iron.

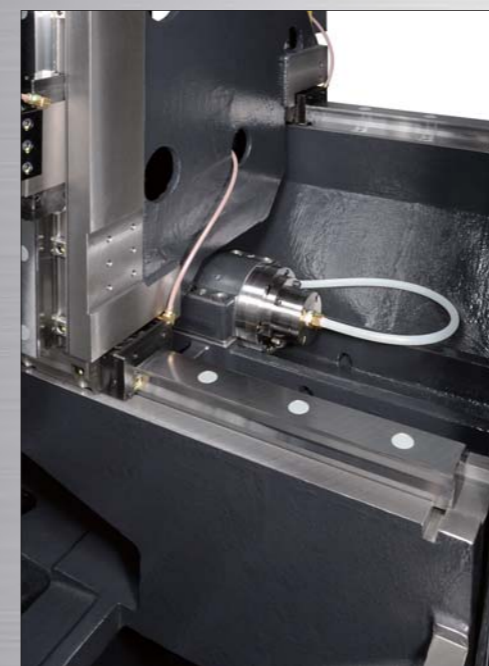

Highly rigid roller guides

Improved reliability


The X-axis and Z-axis HMC400 shutters are a single-plate construction. HMC500 is single Z and double X axis. This design eliminates the risk of binding during cutting and achieves an improvement in the reliability.



Spindle


The spindle bearings are oil-air lubricated. Circulating temperature controlled oil in the casing around the spindle housing reducing the growth of the spindle. Furthermore, OKK's unique radiant cooling system prevents the conduction of heat generated from the motor into the spindle.

Standard spindle 15000min⁻¹

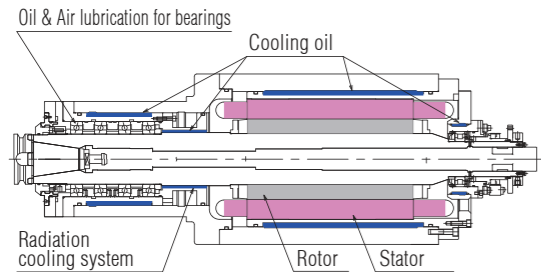


Dual contact tool BT type (Standard)

Improvements in rigidity of tools have been Achieved contact faces of spindle-nose and tool holders flange. This has a great effect not only for heavy load machining but also high speed machining. (The performance is different due to the cutting tools and cutting conditions.)



15000min⁻¹ [37/18.5kW(50/25HP)MS]

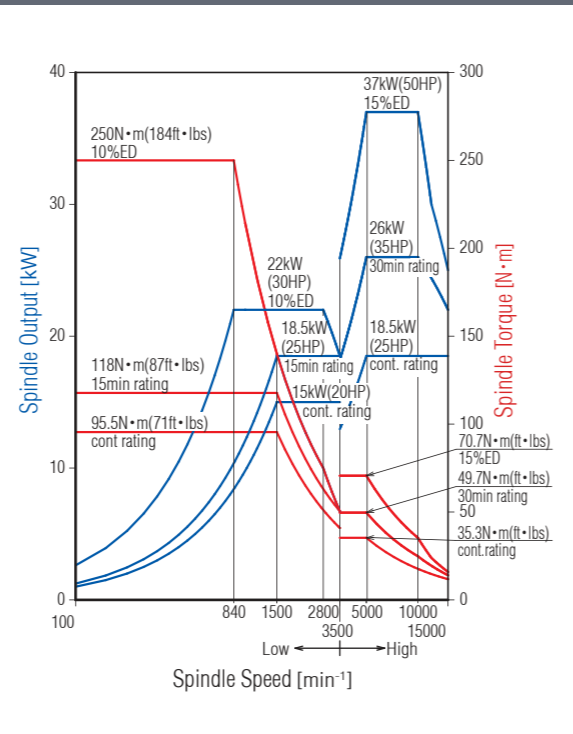


High-precision Machining in a Shorter Cutting Time

The maximum tool length enables tooling longer than the pallet allowing deep boring operations without rotating the part. This allows high-precision machining in a shorter cutting time.

*There is a limit on the diameter of a tool with length of 350mm (13.78")(HMC400) / 475mm (18.70")(HMC500) or longer.


Max. tool length
HMC400:
450mm (17.72")
HMC500:
550mm (21.65")

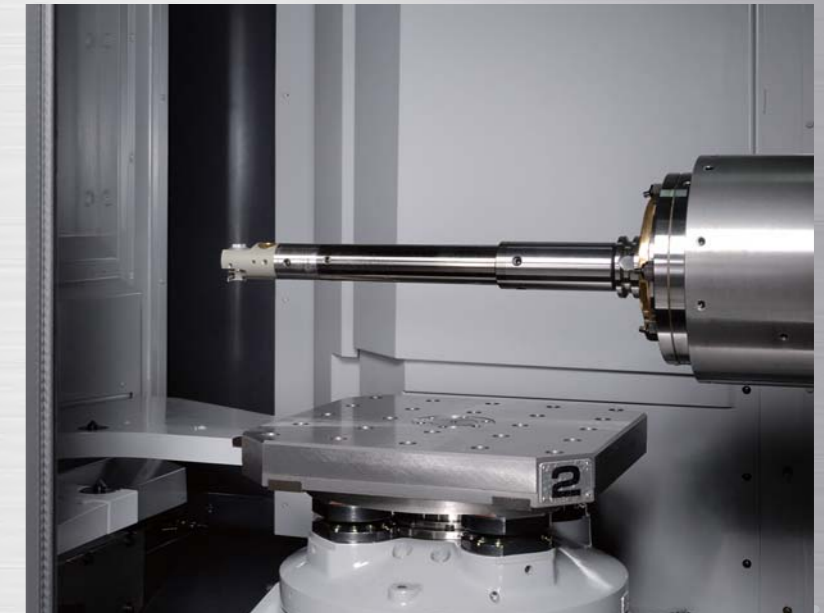


Table

Cutting data


Type of machining	Face milling ø100mm (3.94")x6T	
Machine model	HMC400	HMC500
Spindle speed	800min ⁻¹	800min ⁻¹
Width of cut	80mm (3.15")	80mm (3.15")
Depth of cut	4mm (0.16")	4mm (0.16")
Feed rate	1100mm/min (43ipm)	1320mm/min (52ipm)
Cutting amount	352cm ³ /min (21.5in ³ /min)	422cm ³ /min (25.8in ³ /min)
Spindle motor load	95%	83%
Workpiece material	S45C	S45C




Type of machining	Drill Milling ø26.5mm (1.04")	
Machine model	HMC400	HMC500
Spindle speed	300min ⁻¹	300min ⁻¹
Width of cut	26.5mm (1.04")	26.5mm (1.04")
Feed rate	50mm/min(2ipm)	50mm/min(2ipm)
Cutting amount	27.5cm ³ /min(1.7in ³ /min)	27.5cm ³ /min(1.7in ³ /min)
Spindle motor load	30%	30%
Workpiece material	S45C	S45C




Type of machining	Side milling with End mill ø32mm (1.26")x6T	
Machine model	HMC400	HMC500
Spindle speed	250min ⁻¹	250min ⁻¹
Width of cut	25mm (0.98")	15mm (0.59")
Depth of cut	20mm (0.79")	20mm (0.79")
Feed rate	100mm/min(4ipm)	216mm/min(9ipm)
Cutting amount	50cm ³ /min (3.1in ³ /min)	65cm ³ /min (4in ³ /min)
Spindle motor load	42%	36%
Workpiece material	S45C	S45C



Type of machining	Tap Milling M30xP3.5	
Machine model	HMC400	HMC500
Spindle speed	100min ⁻¹	100min ⁻¹
Feed rate	350mm/min(14ipm)	350mm/min(14ipm)
Spindle motor load	61%	55%
Workpiece material	S45C	S45C



Type of machining	Slotting with End mill ø32 (1.26")x6T	
Machine model	HMC400	HMC500
Spindle speed	250min ⁻¹	250min ⁻¹
Width of cut	32mm (1.26")	32mm (1.26")
Depth of cut	12mm (0.47")	12mm (0.47")
Feed rate	140mm/min(6ipm)	140mm/min(6ipm)
Cutting amount	54cm ³ /min (3.3in ³ /min)	54cm ³ /min (3.3in ³ /min)
Spindle motor load	45%	35%
Workpiece material	S45C	S45C



Workpiece material: A7075



Workpiece material: S50C


Values shown here are for reference to provide an indication of cutting capability.

Chip disposal measures

The standard ceiling shower and two coil-type conveyors on the left- and right-hand side thoroughly remove cutting chips from the machine. The troughs of the coil conveyors shield heat transfer from the cutting chips and coolant to the machine base.



Ceiling shower [Standard]

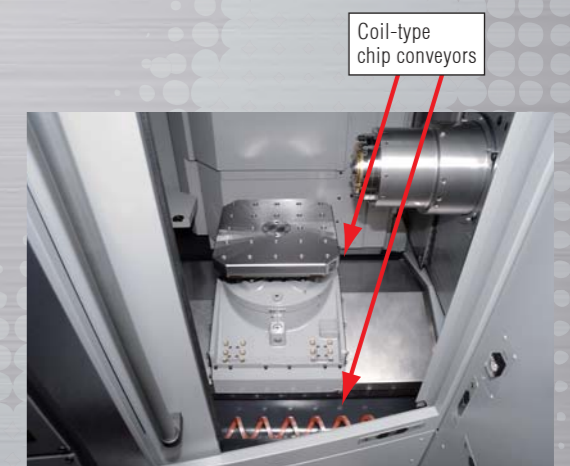

Coil-type chip conveyors [Standard]

ATC [Automatic Tool Changer]

The machine uses a servomotor-driven ATC and magazine, thus providing a stable tool change with excellent durability. A variable-speed ATC function, standard, automatically slows down the ATC turning speed for heavy tools. This allows the tool to be changed smoothly by simply selecting the slow turning speed during tool registration.

Max. tool diameter:
Ø170mm (6.69")

Max. tool length:
HMC400: 450mm (17.72")
HMC500: 550mm (21.65")

Max. tool mass:
12kg (26 lbs)



Foot-operated switch for removing a tool (Standard)



Maximum workpiece size

The HMC Series utilizes a table with a multi-clamp pallet system and has an extended maximum workpiece height, easily accommodating automatic fixture interfaces.

	HMC400	HMC500
Xst.	560mm(22.05")	760mm(29.92")
Yst.	560mm(22.05")	760mm(29.92")
Zst.	690mm(27.17")	800mm(31.50")
Pallet size	□400mm(15.75")	□500mm(19.69")
Maximum workpiece size	Ø630mm(24.80")	Ø800mm(31.50")
Maximum workpiece height *1	920mm(36.22")	1150mm(45.28")
Maximum load mass	400kg(882lbs)	700kg(1543lbs)

*1 The available workpiece height will become lower when a fixture is used.

Maintenance

All of the maintenance devices are centrally located on operator door side for simple daily inspection.



APC [Automatic Pallet Changer]

The APC unit uses a direct-drive lifting and turning mechanism. The unit has been designed for easy expansion to multiple-pallet APC or automatic pallet transfer systems for flexible integration with automation.



User-friendly construction

The operation panel is located on the left-hand side, which enables the operator to see the whole interior of the machine, thus increasing the operator's work efficiency. Furthermore, the front door of the APC opens wide so that the work loading/unloading and setup operations can be easily carried out.



Operator panel and inside of the machine

Environmental measures

LED lamps [Standard]

The machine incorporates LED lamps due to their low heat generation and power consumption savings. Furthermore, the LED lamps to save on replacement costs and maintenance.




LED lamps [Standard]

ECO sleep function [Standard]

If the machine remains idle longer than the specified time period, the machine's present mode is switched to a power-saving mode to reduce wasteful consumption of power, air and so on. When the power-saving mode is active, the equipment such as servos and chip conveyors are turned off. It is cancelled automatically when the setup operation is completed i.e. when the doors are closed.


Power consumption comparison

A power consumption of 1130Wh under normal standby condition is reduced to 743Wh with the eco-sleep function, a reduction of 35%.

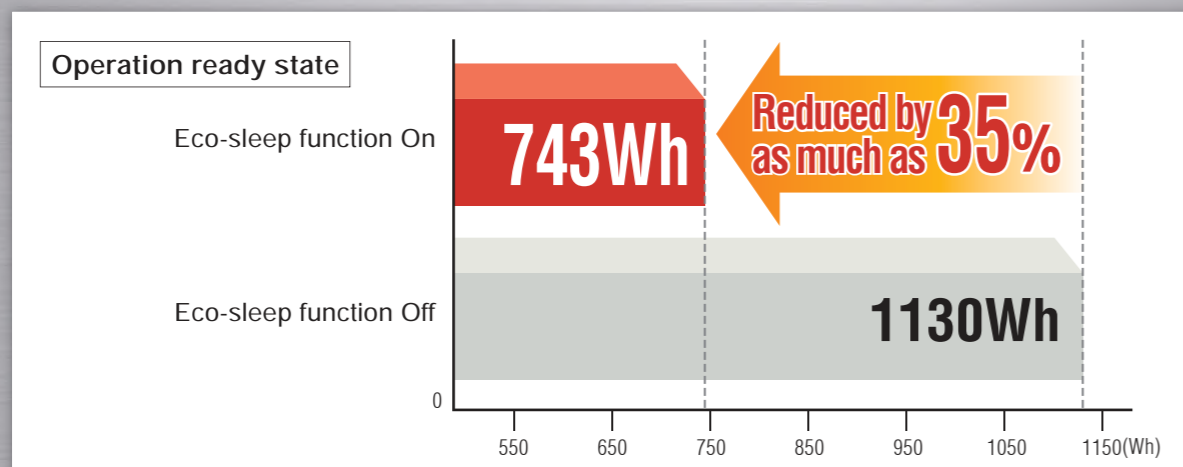

Optional accessories


Constant auto fixture coupler with rotary joints

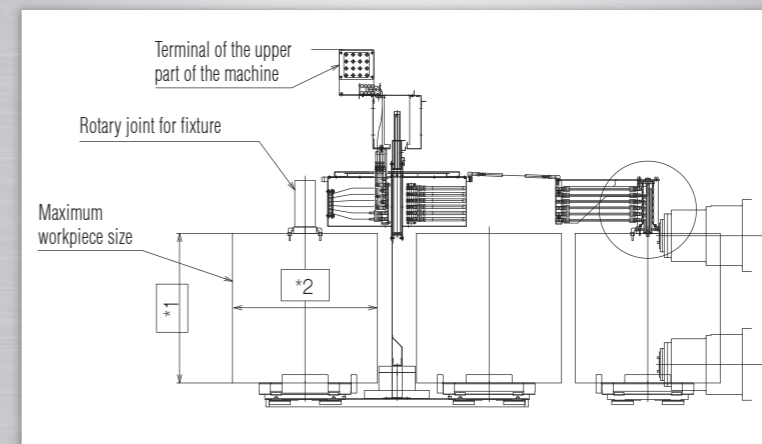

Dimensions of *1

	HMC400	HMC500
3-port	730mm (28.74")	980mm (38.58")
4-port	700mm (27.56")	950mm (37.40")
6-port	650mm (25.59")	900mm (35.43")
8-port	-	850mm (33.46")

Fixture example

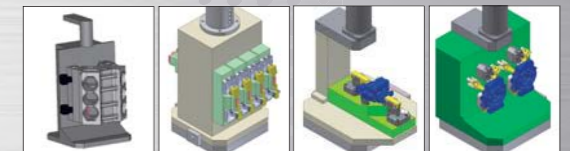

Dimensions of *2

	HMC400	HMC500
Maximum workpiece size	ø630mm (24.80")	ø800mm (31.50")

Lift-up chip conveyor [Option]

Suitable lift up chip conveyor according to type of chips

◎ Most suitable ○ Usable △ Usable under condition × Not usable — Not applicable

Type of chip conveyors		Hinge type		Scrapper type		Magnet Scrapper type		Scrapper type with drum filter		Magnet scrapper type with drum filter			
		Use	Not use	Use	Not use	Use	Not use	Use	Not use	Use	Not use		
Type of chips	Magnetizable chips	Steel	Short curl	◎	◎	○	○	◎	◎	○	—	◎	—
			Spiral	◎	◎	△*2	△*2	△*2	△*2	×	—	×	—
			Long	◎	◎	×	×	×	×	×	—	×	—
		Cast iron	Needle shape	×	△*1	×	○	○*3	○	○	—	◎	—
			Powder and small lump	×	△*1	×	○	○*3	○	○	—	◎	—
			Needle shape	×	△*1	×	○	○*3	○	○	—	◎	—
Non-magnetizable chips	Aluminum	Short curl	×	◎	△*4	○	—	—	◎	—	◎	—	
		Spiral	○	◎	○	○	—	—	△*5	—	△*5	—	
		Long	○	◎	○	○	—	—	△*5	—	△*5	—	
	Aluminum	Needle shape	×	△*1	×	○	—	—	◎	—	◎	—	
		Powder and small lump	×	△*1	×	○	—	—	◎	—	◎	—	

*1 Minute chips can enter the conveyor through a gap on the hinged plate. So, inside of the conveyor needs frequent cleaning.

*2 Scrapper can easily catch long chips. So, shortening the chips (for example by using the step feed) or removing such chips is required.

*3 When flow rate of the coolant is large, filters can be clogged with chips flowed out of the conveyor case.

Therefore, combined use with a magnet plate is recommendable.

*4 When flow rate of the coolant is large, filters can be clogged with chips flowed out of the conveyor case. Therefore, filters require frequent cleaning.

*5 Scrapper can easily catch long chips. Therefore, periodical removal of chips is needed. If they remain, a drum filter may be damaged.

Optional accessories

Air blow nozzle

For dry cutting applications.



Mist collector

Mist collector suctions mist from the splash guards and is recommended when high-pressure coolant is used.



Oil skimmer

Oil skimmer collects contaminated oil from a coolant tank.



116 tool magazine



Lift-up chip conveyor

To separate chips and coolant, and discharge to the outside only chips.



T1-C

Tool length measurement/ Tool break detection



Set-up LED

Set-up station incorporates LED lamps improves work efficiency.



Option check sheet


Item	Description
<input type="checkbox"/> Changing the type of pull stud	<input type="checkbox"/> MASII 60°
<input type="checkbox"/> Dual-contact tool	<input type="checkbox"/> HSK-A63
<input type="checkbox"/> Tool magazine	HMC400: <input type="checkbox"/> 60tools, <input type="checkbox"/> 116tools HMC500: <input type="checkbox"/> 40tools, <input type="checkbox"/> 116tools
<input type="checkbox"/> Multi-pallet APC	<input type="checkbox"/> 7APC
<input type="checkbox"/> Pallet top surface	<input type="checkbox"/> T-slot
<input type="checkbox"/> Additional pallet	
<input type="checkbox"/> APC safety door automatic open / close	
<input type="checkbox"/> Oil skimmer	
<input type="checkbox"/> Addition of lighting system	<input type="checkbox"/> LED lamp in the APC setup station
<input type="checkbox"/> Signal lamp	<input type="checkbox"/> 3-lamps type without buzzer <input type="checkbox"/> 3-lamps type with buzzer
<input type="checkbox"/> Coolant-through-spindle	<input type="checkbox"/> Center through
<input type="checkbox"/> Coolant unit	<input type="checkbox"/> 2 MPa (290psi) <input type="checkbox"/> 7 MPa (1015psi) <input type="checkbox"/> With coolant cooler <input type="checkbox"/> Without coolant cooler
<input type="checkbox"/> Air blow nozzle	<input type="checkbox"/> 1 nozzle
<input type="checkbox"/> Swirl stopper block	<input type="checkbox"/> For angle attachment
<input type="checkbox"/> Workpiece flushing equipment	<input type="checkbox"/> Shower gun type
<input type="checkbox"/> Mist collector	
<input type="checkbox"/> Lift-up chip conveyor	<input type="checkbox"/> Hinged type <input type="checkbox"/> Scraper type <input type="checkbox"/> Magnet scraper type <input type="checkbox"/> Scraper type with drum filter (for aluminum + iron) <input type="checkbox"/> Magnet scraper type with drum filter (for aluminum + casting)
<input type="checkbox"/> Chip bucket	<input type="checkbox"/> Fixed type <input type="checkbox"/> Swing type
<input type="checkbox"/> Standard tool set	<input type="checkbox"/> Including a tool box
<input type="checkbox"/> Mass block	
<input type="checkbox"/> Angle plate	
<input type="checkbox"/> 2-face angle plate	
<input type="checkbox"/> Fixture interface	<input type="checkbox"/> 3ports <input type="checkbox"/> 4ports <input type="checkbox"/> 6ports <input type="checkbox"/> 8ports (HMC500 only)
<input type="checkbox"/> Touch sensor system T1	<input type="checkbox"/> Workpiece measurement <input type="checkbox"/> Tool length measurement / Tool break detection
<input type="checkbox"/> Tool break detection inside the magazine	
<input type="checkbox"/> Automatic restart at tool damage	
<input type="checkbox"/> Tool presence/absence detection	

OKK's dedicated control functions

Setup support function

T1-A: Automatic workpiece measurement/ compensation [Option]

- The touch sensor attached to the spindle is moved to a workpiece in the automatic operation until it contacts the workpiece then based on the travel distance at that time, the required compensation amount is calculated and set as the data for the workpiece coordinate system.
- The measurement and compensation program is created according to the specified format and then executed.

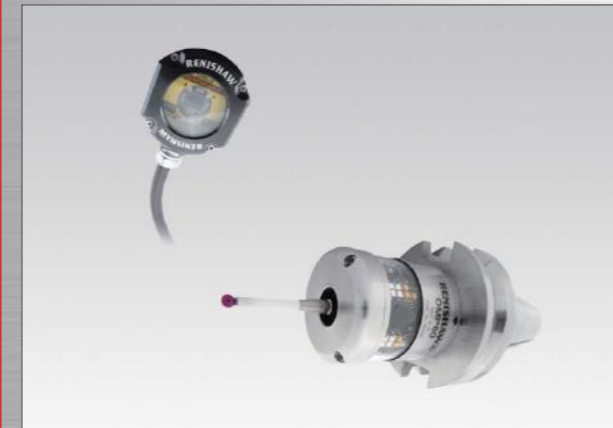

T0 Software [Option]

This screen enables the simple manual measurement using the touch sensor (option: T1-A or T1-B). You can move the sensor to the desired measuring point by handle mode then the machine starts the automatic measurement after the sensor contacts the workpiece. You can set the results of the measurement as the data for the desired workpiece coordinate system and tool offset number through the single key operation.

Reference plane

Width

Diameter

Coordinate rotation

Distance

Workpiece measurement screen (FAI)

Tool length measurement screen (FAI)

High-efficiency control technologies

Hyper HQ control [Option]

High-speed processing is enabled by improved capability of processing fine line segment toolpaths.

<F31i-B/FAI capability of processing fine line segments>

Type	Look-ahead processing(FAi)	Fine line segment data processing speed(m/min)(F31i)	Command method
Without Hyper HQ control	Max.20 blocks	15 (591ipm)	—
Hyper HQ control mode A	Max.20 blocks	30 (1181ipm)	ON: G05.1Q1; OFF: G05.1Q0
Hyper HQ control mode B	—	150 (5906ipm)	ON: G05.1Q1; OFF: G05.1Q0

HQ tuner [Option]

The HQ tuner provides the programmer a 10-step adjustment of parameters for hyper HQ control in accordance with processing conditions. It adjusts the hyper HQ control in accordance with the current process. For example, during roughing routines the programmer can place a higher priority on speed and in finishing routines a higher priority on dimensional accuracy at corners and circular arcs.



Technologies for reduced setup and unmanned operation

Soft AC [Option]

The soft AC function applies the feed rate override control automatically so that the value of the spindle load meter does not change significantly. This helps to prevent damages of tools caused by overload and improves cutting efficiency.

Adaptive control function

Feed override control range: 10 to 200%.
(Changeable with parameters)
Alarms are output at the lower limit override value.

Air-cut reduction function

Feed rates during non-cutting operation can be increased up to 200%.
(Changeable with parameters)

Tool failure monitoring function

Specifications similar to the soft CCM.

Continuous unmanned processing at the time of tool failure

Combined operation with the automatic restart function (Another option) is possible.

Soft CCM [Option]

The Soft CCM monitors the spindle load meter, and stops operation when the meter value exceeds the preset value (set by M signal or set for each of the T numbers through setting screen) and generation of abnormal tool load is determined which is convenient for unmanned operation at night.

Network function

Data server [Option]

Large machining programs can be transferred to the data server through the network connected to the host computer at high speed. The transferred machining programs are executed as the main program or the sub program called up with the M198.



Specifications

Specifications

Item		HMC400
Travel on X axis (Column: right/left)	mm	560 (22.05")
Travel on Y axis (Spindle head: up/down)	mm	560 (22.05")
Travel on Z axis (Pallet: back/forth)	mm	690 (27.17")
Distance from table top surface to spindle center	mm	80-640 (3.15"-25.20")
Distance from table center to spindle nose	mm	50-740 (1.97"-29.13")
Table (Pallet) work surface area	mm	□400 (15.75")
Max. workpiece weight loadable on table (pallet)	kg	400(882lbs)[Uniformly distributed load]
Max. workpiece size loadable on table (pallet)	mm	ø630×920 (ø24.80"×36.22")
Table (Pallet) top surface configuration		24×M16 tap
Min. indexable angle of table (pallet)	deg	0.001°
Spindle speeds	min ⁻¹	100-15000
Number of spindle speed		2-step (Winding change system)
Spindle nose(nominal number)		7/24 taper No.40 Dual-contact type
Spindle bearing bore diameter	mm	ø70(2.76")
Rapid traverse rate	X × Y × Z	m/min 63 (2480opm)
	B	min ⁻¹ 33.3
Cutting feed rate *1	X × Y × Z	mm/min 1-40000 (0.04-1575ipm) *1
	B	min ⁻¹ 1-27.7 *1
Tool shank(nominal number)		JIS B 6339 BT40
Pull stud(nominal number)		MAS I (45°)
Number of storable tools	tool	40 *2
Max. tool diameter	mm	ø95 (3.74") [ø170 (6.69") with no tools in adjacent pots]
Max. tool length (from the gauge line)	mm	450 (17.72") *3
Max. tool weight	kg	5 (11lbs) [12 (26lbs) with slow ATC cycle] / Total 200 (440lbs)
Max. tool moment	N·m	9.8 (7.2ft·lbs)
Tool selection method		Address fixed random method
Tool exchange time (cut-to-cut)	sec	2.8
Pallet exchange method		Direct turn method
Pallet exchange time (JIS evaluation time)	sec	9.0
Spindle motor (15%ED/30min/Continuous rating)	kW	37/26/18.5 (50HP/35HP/25HP)
Feed motors	kW	X,Y,Z: 5.5 (7.4HP) B: 2.7 (3.6HP)
Coolant pump motor	kW	60Hz: 1.2 (1.6HP) 50Hz: 0.7 (0.9HP)
Hydraulic pump motor	kW	1.5 (2HP)
Spindle and feed system cooling oil pump motor(oil cooler)	kW	1.1/0.4 (1.5HP/0.5HP) [compression/discharge]
Spindle lubrication oil pump motor (oil air lubrication)	kW	0.017 (0.02HP)
ATC motor	kW	1.2 (1.6HP)
Tool Magazine motor	kW	1.4 (1.9HP)
APC motor	kW	1.8 (2.4HP)
Power supply AC200V±10% 50/60Hz±1Hz AC220V±10% 60Hz±1Hz	kVA	51
Compressed air supply	Mpa, l/min[ANR]	0.4-0.6 (58-87psi) *4, Min.500 (132gpm) *4 *5
Coolant tank capacity	L	530 (140gal)
Spindle and feed system cooling oil tank capacity(oil cooler)	L	20 (5gal)
Spindle lubrication oil tank capacity (oil air lubrication)	L	2 (0.5gal)
Lubrication oil tank capacity	L	20(5gal)
Machine height(from floor surface)	mm	2640 (103.94")
Required floor space	mm	2605×4480 (102.56"×176.38")
Machine weight	kg	8500 (19000lbs)
Operating environment temperature	°C	5-40

Standard accessories

Item	Q'ty	Remarks
LED lamp	1set	
Coolant tank (installed separately)	1set	Tank capacity 530L (140gal)
Splash Guard/APC safety guard	1set	
Slide way protection sliding covers for X,Y and Z axes	1set	
Earth leakage breaker	1set	
Automatic power off	1set	
Edge locator	1set	
Signal lamp	1set	2-lamps type without buzzer
Direct-turn APC unit	1set	
Coil-type chip conveyor	1set	1 set for each of right and left
Hydraulic unit (installed separately)	1set	

Item	Q'ty	Remarks
Ceiling shower	1set	
Spindle head and ball screw cooling oil temperature controller (installed separately)	1set	
Ball screw and tool magazine automatic grease lubrication unit	1set	
Oil air lubrication unit	1set	
Foundation parts for machine anchoring (Bond anchoring method)	1set	with bond
Magazine tool holder remove device	1set	
Instruction manual	1set	
Electrical instruction manual (including electrical diagrams)	1set	

*1: Under the HQ or Hyper HQ control

*2: The number of storable tools refers the total number of tools including the one attached to the spindle i.e. subtract one from the above for the number of tools storable in the tool magazine.


*3: Conditional.For details, refer to tool limits drawing.

*4: Purity of the supplied air should be equivalent to or higher than Class 3.5.4 specified in ISO 8573-1/JIS B8392-1.


*5: The flow rate for the standard specification machine is specified in the above. When optional specifications such as an air blower is added,add the corresponding air supply according to the operating frequency.

Dimensions [mm]


Front view

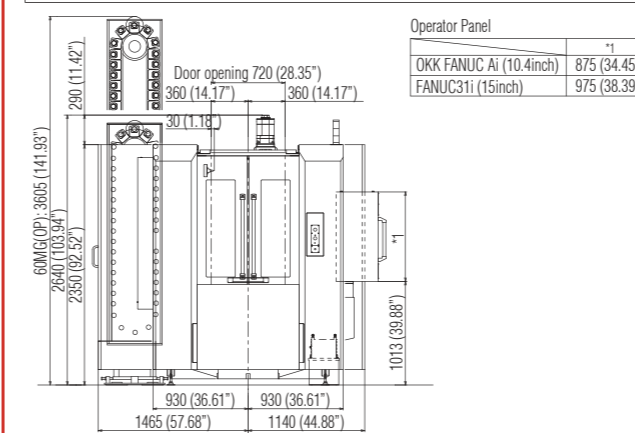


Side view

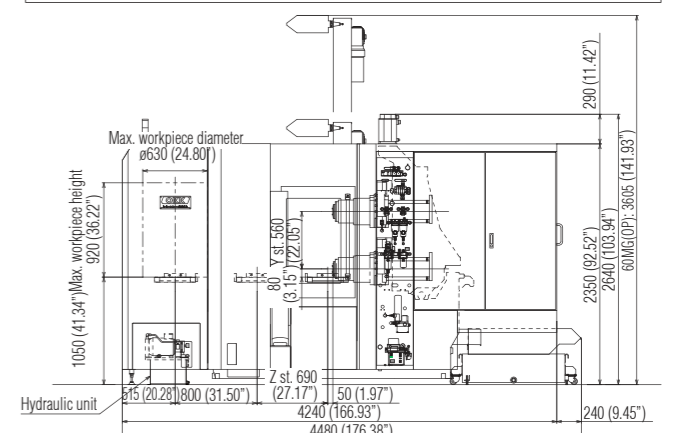


Floor space

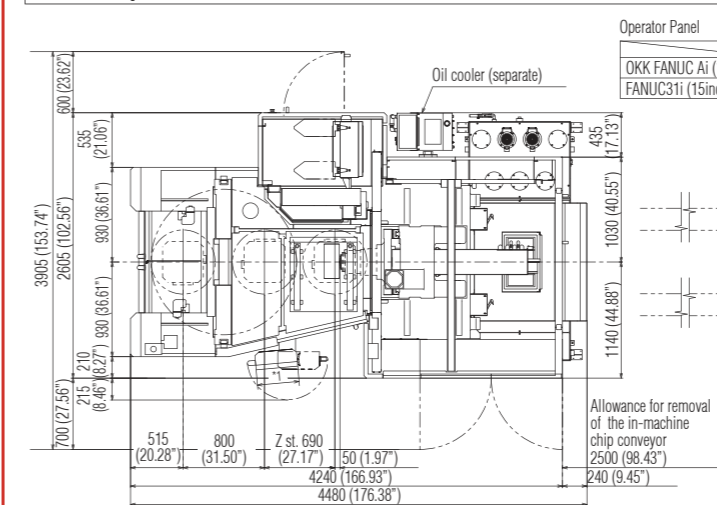


Restrictions on tool

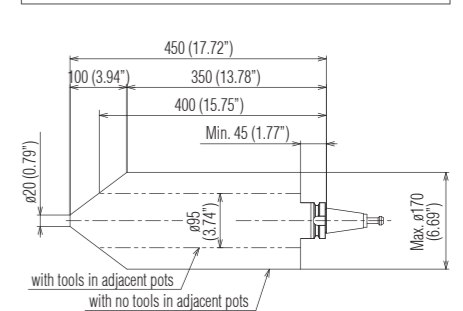

Pallet

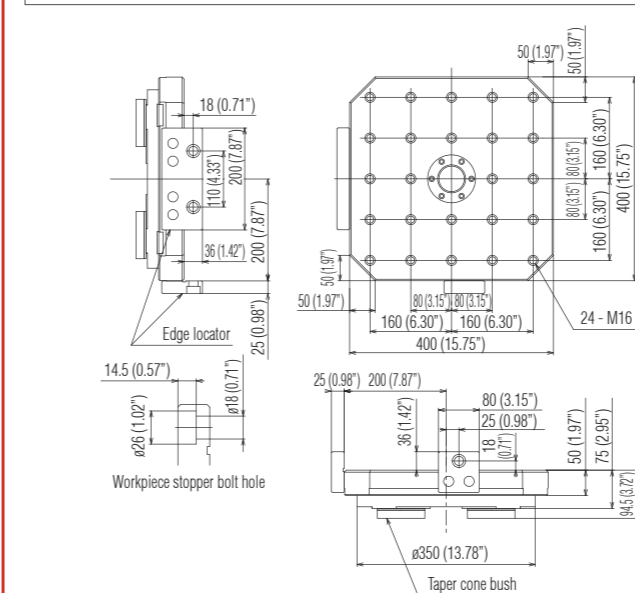

Stroke diagram

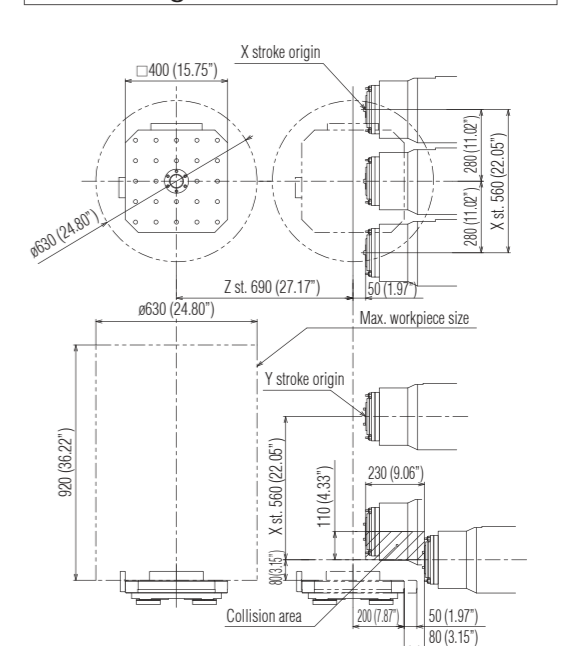

Specifications

Specifications

Item		HMC500
Travel on X axis (Column: right/left)	mm	760 (29.92")
Travel on Y axis (Spindle head: up/down)	mm	760 (29.92")
Travel on Z axis (Pallet: back/forth)	mm	800 (31.50")
Distance from table top surface to spindle center	mm	80-840 (3.15"-33.07")
Distance from table center to spindle nose	mm	70-870 (2.76"-34.25")
Table (Pallet) work surface area	mm	□500 (19.69")
Max. workpiece weight loadable on table (pallet)	kg	700 (1543lbs) [Uniformly distributed load]
Max. workpiece weight loadable on table (pallet)	mm	ø800×1150 (ø31.50"×45.28")
Table (Pallet) top surface configuration		24×M16 tap
Min. indexable angle of table (pallet)	deg	0.001°
Spindle speed	min ⁻¹	100-15000
Number of spindle speed		2-step (Winding change system)
Spindle nose (nominal number)		7/24 taper No.40 Dual-contact type
Spindle bearing bore diameter	mm	ø70 (2.76")
Rapid traverse rate	X × Y × Z	m/min 63 (2480opm)
	B	min ⁻¹ 40
Cutting feed rate *1	X × Y × Z	mm/min 1-40000 (0.04-1575ipm) **1
	B	min ⁻¹ 1-27.7 **1
Tool shank (nominal number)		JIS B 6339 BT40
Pull stud (nominal number)		MAS I (45°)
Number of storable tools	tool	60 **2
Max. tool diameter	mm	ø95 (3.74") [ø170 (6.69") with no tools in adjacent pots]
Max. tool length (from the gauge line)	mm	550 (21.65") **3
Max. tool weight	kg	5 (11lbs) [12 (26lbs) with slow ATC cycle] / Total 300 (661lbs)
Max. tool moment	N·m	9.8 (7.2ft·lbs)
Tool selection method		Address fixed random method
Tool exchange time (cut-to-cut)	sec	2.9
Pallet exchange method		Direct turn method
Pallet exchange time (JIS evaluation time)	sec	13
Spindle motor (15%ED/30min/Continuous rating)	kW	37/26/18.5 (50HP/35HP/25HP)
Feed motors	kW	X,Y,Z: 5.5 (7.4HP) B: 4.5 (6.0HP)
Coolant pump motor	kW	60Hz: 1.2 (1.6HP) 50Hz: 0.7 (0.9HP)
Hydraulic pump motor	kW	1.5 (2HP)
Spindle and feed system cooling oil pump motor (oil cooler)	kW	1.1/0.4 (1.5HP/0.5HP) [compression/discharge]
Tool Magazine motor	kW	0.017 (0.02HP)
ATC motor	kW	1.2 (1.6HP)
Tool Magazine motor	kW	1.4 (1.9HP)
APC motor	kW	2.5 (3.4HP)
Power supply AC200V±10% 50/60Hz±1Hz AC220V±10% 60Hz±1Hz	kVA	48
Compressed air supply	Mpa, l/min[ANR]	0.4-0.6 (58-87psi) **4, Min.500 (132gpm) **4 **5
Coolant tank capacity	L	530 (140gal)
Spindle and feed system cooling oil tank capacity (oil cooler)	L	20 (5gal)
Spindle lubrication oil tank capacity (oil air lubrication)	L	2 (0.5gal)
Lubrication oil tank capacity	L	20 (5gal)
Machine height (from floor surface)	mm	3605 (141.93")
Required floor space	mm	2750×4845 (108.27"×190.75")
Machine weight	kg	10500 (23148lbs)
Operating environment temperature	°C	5-40


Standard accessories

Item	Q'ty	Remarks
LED lamp	1set	
Coolant tank (installed separately)	1set	Tank capacity 530L (140gal)
Splash Guard/APC safety guard	1set	
Slide way protection sliding covers for X,Y and Z axes	1set	
Earth leakage breaker	1set	
Automatic power off	1set	
Edge locator	1set	
Signal lamp	1set	2-lamps type without buzzer
Direct-turn APC unit	1set	
Coil-type chip conveyor	1set	1 set for each of right and left
Hydraulic unit (installed separately)	1set	

Item	Q'ty	Remarks
Ceiling shower	1set	
Spindle head and ball screw cooling oil temperature controller (installed separately)	1set	
Ball screw and tool magazine automatic grease lubrication unit	1set	
Oil air lubrication unit	1set	
Foundation parts for machine anchoring (Bond anchoring method)	1set	with bond
Magazine tool holder remove device	1set	
Instruction manual	1set	
Electrical instruction manual (including electrical diagrams)	1set	

*1: Under the HQ or Hyper HQ control
 *2: The number of storable tools refers the total number of tools including the one attached to the spindle i.e. subtract one from the above for the number of tools storable in the tool magazine.
 *3: Conditional.For details, refer to tool limits drawing.
 *4: Purity of the supplied air should be equivalent to or higher than Class 3.5.4 specified in ISO 8573-1/JIS B8392-1.
 *5: The flow rate for the standard specification machine is specified in the above. When optional specifications such as an air blower is added,add the corresponding air supply according to the operating frequency.

Dimensions [mm]

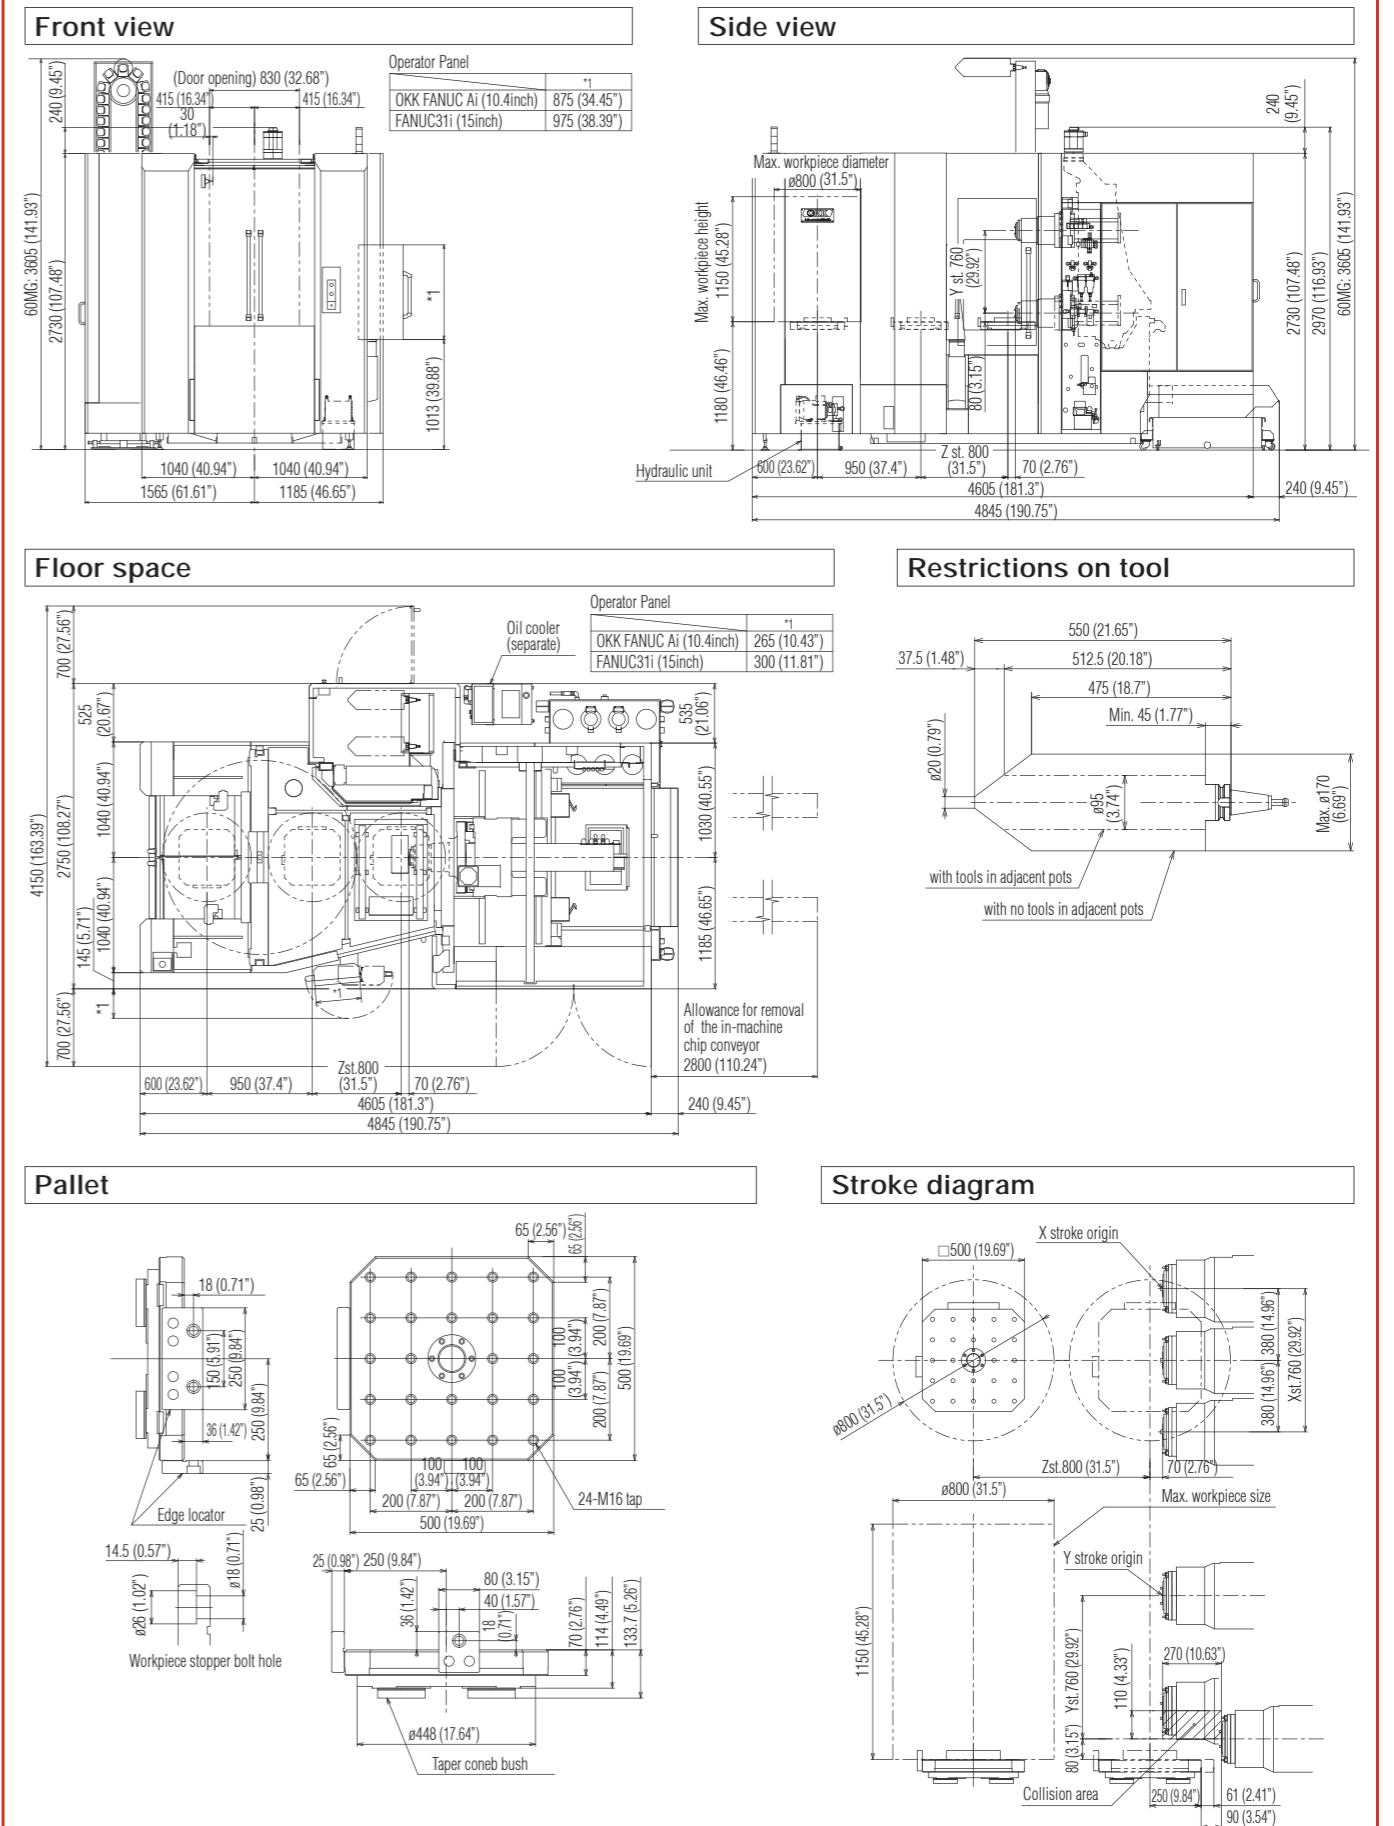

Controller

FANUC Controller FAi

Standard Specification

No. of controlled axes: 4 axes (X, Y, Z, B)
No. of simultaneously controlled axes: 4 axes
Least input increment: 0.001mm/0.0001"
Max. programmable dimension: ±999999.999mm/±39370.0787"
Absolute/Incremental command: G90/G91
Decimal point input/Pocket calculator type decimal point input
Inch/Metric conversion: G20/G21
Program code: ISO/EIA automatic discriminaton
Program format: FANUC standard format
Nano interpolation(internal)
Positioning: G00
Linear interpolation: G01
Circular interpolation: G02/G03 (CW/CCW), including radius designation
Unidirectional positioning: G60
Helical interpolation
Cylindrical interpolation
Cutting feed rate: 6.3-digit F-code, direct command
Dwell: G04
Manual handle feed: manual pulse generator 1 set (0.001, 0.01, 0.1mm)
Rapid traverse override: 0/1/10/25/50/100%
Cutting feed rate override: 0 to 200% (every 10%)
Feed rate override cancel: M49/M48
Rigid tapping: G84, G74 (Mode designation: M29)
One-digit F code feed
Part program storage capacity: 1280m [512KB]
No. of registered programs: 400
Background editing
Extended part program editing
10.4" color LCD
Clock function
MDI (Manual Data Input) operation
Run hour and parts count display
Memory card/USB interface
Spindle function: 5-digit S-code direct command
Spindle speed override: 50 to 150% (every 5%)
Tool function: 4-digit T-code direct command
ATC tool registration
Auxiliary function: 3-digit M-code programming
Multiple M-codes in 1 block: 3 codes (Max. 20 settings)
Tool length offset: G43, G44/G49
Tool diameter and cutting edge R compensation: G41, G42/G40
Tool offset sets: 400 sets in total
Tool offset memory C
Tool position offset
Manual reference position return
Automatic reference position return: G28/G29
2nd reference position return: G30
Reference position return check: G27
Automatic coordinate system setting
Coordinate system setting: G92
Machine coordinate system: G53
Workpiece coordinate system: G54 to G59
Addition of workpiece coordinate system (48 sets in total): G54.1 P1 to P48
Local coordinate system: G52
Program stop: M00
Optional stop: M01
Optional block skip: /

Standard Specification

Addition of optional block skip: 9 in total
Dry run
Machine lock
Z-axis feed cancel
Auxiliary function lock
Graphic display
Program number search
Sequence number search
Program restart
Cycle start
Auto restart
Single block
Feed hold
Manual absolute on/off: parameter
Sequence number comparison and stop
Manual handle interruption
Sub program control
Canned cycle: G73, G74, G76, G80 to G89
Mirror image function: parameter
Automatic corner override
Exact stop check/mode
Programmable data input: G10
Programmable mirror image
Optional chamfering/corner R
Custom macro
Interruption type custom macro
Addition of custom macro common variables: 600
Coordinate system rotation: G68, G69
Scaling: G50, G51
Backlash compensation for each rapid traverse and cutting feed
Memory pitch error compensation
Skip function
Tool length manual measurement
Automatic tool length measurement: G37/G37.1
Tool life management: 128 sets in total
Emergency stop
Data protection key
NC alarm display/alarm history display
Machine alarm display
Stored stroke check 1
Stored stroke check 2, 3
Load monitor
Self-diagnosis
Absolute position detection
Manual guide i (Basic)

Optional Specification

Least input increment: 0.0001mm/0.00001"
FS10/11 tape format
Part program storage capacity: 5120m [2MB] (400 in total)
RS232C interface: RS232C-1CH
Data server: ATA card (1GB)
Spindle contour control (Cs contour control)
Addition of workpiece coordinate system (300 sets in total): G54.1P1 to P300]
Chopping
High-speed skip
Manual guide i (Milling cycle)

Original OKK Software

HQ control	STD
Hyper HQ control mode A	OP
Special canned cycle (including circular cutting)	OP
Cycle mate F	OP
Soft scale II m	STD
Touch sensor T0 software	OP
Tool failure detection system (Soft CCM)	OP
Adaptive control (Soft AC)	OP
Automatic restart at tool damage	OP

STD: Standard

FANUC Controller F31i-B

(Windows CE-installed Open CNC)

Standard Specification

No. of controlled axes: 4 axes (X, Y, Z, B)
No. of simultaneously controlled axes: 4 axes
Least input increment: 0.001mm / 0.0001"
Max. programmable dimension: ±999999.999mm / ±39370.0787"
Absolute / Incremental command: G90 / G91
Decimal point input / Pocket calculator type decimal point input
Inch / Metric conversion: G20 / G21
Program code: ISO / EIA automatic discriminaton
Program format: FANUC standard format
Nano interpolation (internal)
Positioning: G00
Linear interpolation: G01
Circular interpolation: G02 / G03 (CW / CCW), including radius designation
Cutting feed rate: 6.3-digit F-code, direct command
Dwell: G04
Manual handle feed: manual pulse generator 1 set(0.001, 0.01, 0.1mm)
Rapid traverse override: 0 / 1 / 10 / 25 / 50 / 100%
Cutting feed rate override: 0 to 200% (every 10%)
Feed rate override cancel: M49 / M48
Rigid tapping: G84, G74 (Mode designation: M29)
Part program storage capacity: 160m [64KB]
No. of registered programs: 120
Part program editing
Background editing
Extended part program editing
15" color LCD/QWERTY key MDI
Clock function
MDI (Manual Data Input) operation
Memory card interface
Spindle function: 5-digit S-code direct command
Spindle speed override: 50 to 150% (every 5%)
Tool function: 4-digit T-code direct command
ATC tool registration
Auxiliary function: 3-digit M-code programming
Multiple M-codes in 1 block: 2 codes (HM400/HM500S/HM5000/HM6300S: 3 codes (Max. 20 settings))
Tool length offset: G43, G44/G49
Tool diameter and cutting edge R compensation: G41, G42/G40
Tool offset sets: 99 sets in total
Tool offset memory C
Manual reference position return
Automatic reference position return: G28/G29
2nd reference position return: G30
Reference position return check: G27
Automatic coordinate system setting
Coordinate system setting: G92
Machine coordinate system: G53
Workpiece coordinate system: G54 to G59
Local coordinate system: G52
Program stop: M00
Optional stop: M01
Optional block skip: /
Dry run
Machine lock
Z-axis feed cancel
Auxiliary function lock
Graphic display
Program number search

Standard Specification

Sequence number search
Program restart
Cycle start
Auto restart
Single block
Feed hold
Manual absolute on/off: parameter
Sub program control
Canned cycle: G73, G74, G76, G80 to G89
Mirror image function: parameter
Automatic corner override
Exact stop check/mode
Programmable data input: G10
Backlash compensation for each rapid traverse and cutting feed
Smooth backlash compensation
Memory pitch error compensation (interpolation type)
Skip function
Tool length manual measurement
Emergency stop
Data protection key
NC alarm display / alarm history display
Machine alarm display
Stored stroke check 1
Stored stroke check 2, 3
Load monitor
Self-diagnosis
Absolute position detection
Manual guide i (Basic)

Optional Specification

Additional one axis control: name of axis(A, B, C, U, V, W) *	
Additional two axes control: name of axis(A, B, C, U, V, W)*	
Least input increment: 0.0001mm / 0.00001"	
FS15 tape format	
Unidirectional positioning: G60	
Helical interpolation	PK1
Cylindrical interpolation	
Hypothetical axis interpolation	
Spiral/Conical interpolation	
Smooth interpolation (Hyper HQ control B mode is required)	
NURBS interpolation (Hyper HQ control B mode is required)	
Involute interpolation	
One-digit F code feed	
Handle feed 3 axes (Standard pulse handle is removed)	
Part program storage capacity: 320m [128KB] (250 in total)	
Part program storage capacity: 640m [256KB] (500 in total)	
Part program storage capacity: 1280m [512KB] (1000 in total)	PK1
Part program storage capacity: 2560m [1MB] (1000 in total)	
Part program storage capacity: 5120m [2MB] (1000 in total)	
Part program storage capacity: 10240m [4MB] (1000 in total)	
Part program storage capacity: 20480m [8MB] (1000 in total)	
RS232C interface: RS232C-1CH	
Data server: ATA card (1GB)	PK2
Data server: ATA card (4GB)	
Spindle contour control (Cs contour control)	
Tool position offset	
3-dimensional cutter compensation	
Tool offset sets: 200 sets in total	PK1

Optional Specification

Tool offset sets: 400 sets in total	
Tool offset sets: 499 sets in total	
Tool offset sets: 999 sets in total	
Addition of workpiece coordinate system (48 sets in total): G54.1 P1 to P48	PK1
Addition of workpiece coordinate system (300 sets in total): G54.1 P1 to P300	
Machining time stamp	
Addition of optional block skip: 9 in total	
Tool retract and return	
Sequence number comparison and stop	
Manual handle interruption	
Programmable mirror image	PK1
Optional chamfering / corner R	
Custom macro	PK1
Interruption type custom macro	
Addition of custom macro common variables: 600	
Figure copy	
Coordinate system rotation: G68, G69	
Scaling: G50, G51	
Chopping (Axis control by PMC)	
Playback	
Automatic tool length measurement: G37 / G37.1	
Tool life management: 256 sets in total	PK1
Addition of tool life management sets: 1024 sets in total	
High-speed skip	
Run hour and parts count display	PK1
Manual guide i (Milling cycle)	

Original OKK Software

Machining support integrated software (including Help guidance, etc.)	STD
Tool support	STD
Program editor	STD
EasyPRO	STD
Work manager	OP
HQ control	STD
Hyper HQ control mode A	OP
Hyper HQ control mode B	PK2 OP
Hyper HQ value kit (including the items with "PK2")	OP
NC option package (including the items with "PK1")	OP
Special canned cycle (including circular cutting)	OP
Cycle mate F	OP
Soft scale II m	STD
Touch sensor T0 software	OP
Tool failure detection system (Soft CCM)	OP
Adaptive control (Soft AC)	OP
Automatic restart at tool damage	OP

STD: Standard